

**1. Top Shelf**

(4 knockout dimples in bottom of tray for optional locking drawer, 8006RB)




**2. Bottom Shelf**


(16 pre-drilled holes in bottom of tray for attaching casters)



**3. Non-locking Caster (x2)**








**4. Locking Caster (x2)**





**5. Leg (x4)**



-  Long Bolt (x 4)
-  Short Bolt (x 44)
-  Nut (x 48)
-  Lock Washer (x 48)
-  Washer (x 96)

- #7. Bolt Kit contains:  
28 short bolts, nuts, and washers for the legs.
- #8. Bolt Kit contains:  
4 long bolts, nuts and washers for the handle.
- #9. Bolt Kit contains:  
16 short bolts, nuts, and washers for the casters.

**6. Handle**

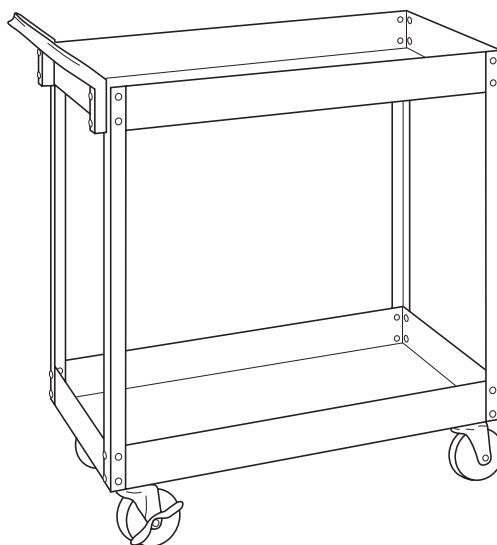

**ITEMS NEEDED FOR ASSEMBLY:**

- #2 Phillips head screwdriver
- 10mm wrench

**ASSEMBLY INSTRUCTIONS:**

1. Using a 10mm size wrench, Phillips head screwdriver, and part #9 (bolt kit containing 16 short bolts, nuts and washers), attach part #3 (2 non-locking casters) and part #4 (2 locking casters) to each end of part #2 (bottom shelf with 16 pre-drilled holes).
  2. Using the 10mm size wrench, Phillips head screwdriver, and part #7 (bolt kit 16 pieces of the 28 short bolts, nuts and washers), attach part #5 (4 legs) to part #2 (bottom shelf).
  3. Using the 10mm size wrench, Phillips head screwdriver, and part #7 (bolt kit –remaining 12 pcs. of the 28 short bolts, nuts, and washers) attach part #1 (top shelf) to the legs and bottom shelf.
- Note: In order to place the handle on the same end as the locking casters, leave the 4 outside holes open on the locking caster end of the cart. Follow step 4 below and attach the handle.
4. Using the 10mm size wrench, Phillips head screwdriver, and part #8 (bolt kit – 4 long bolts, nuts, and washers) attach part #6 (handle) to the cart.

**REPLACEMENT PARTS AVAILABLE:**

- RS8003LC ..... Locking Caster (ea.)
- RS8003SC ..... Non-locking Caster (ea.)
- RS8003CHDL..... Chrome Handle